




SHOP SMART. SHOP VALUE
SHOP *differently*



LiteLighting 55W Tri-colour Non-dimmable Backlit LED Panel 595x1195

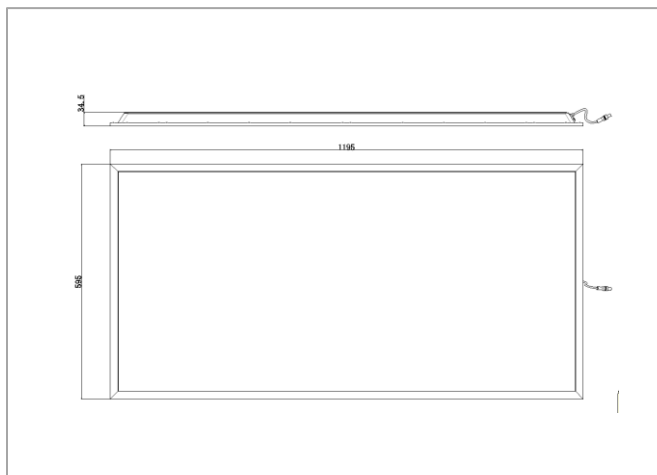

MODEL	CS-LL-PL03-60120ND-55W-CCT-NZ	HOUSING COLOUR	White
INPUT VOLTAGE (V)	AC 220-240V	MATERIAL	PS+AL+SPCC
IC-4 RATED (Y/N)	NO	IP	20
POWER FACTOR (PF)	>0.9	OPERATING TEMPERATURE (°C)	0~40°C
WATTAGE (W)	55	DIMMABLE (Y/N)	NO
FLICKER FREE (Y/N)	YES	DIMMING TYPE	NA
LUMEN OUTPUT (LM)	6,050LM	INSTALLATION TYPE	Recessed
EFFICACY (LM/W)	110LM/W	HOLE OUT (mm)	556*1156
COLOUR TEMPERATURE (K)	Tri-colour: 3000K/4000K/5700K	DIMENSION (mm)	595*1195*34.5
BEAM ANGLE (°)	110°	NET WEIGHT (kg)	3.6
CRI (Ra)	80	LIFESPAN (Hours)	50,000
SDCM	5	WARRANTY	3 years
UGR	22	COMPLIANCE	SAA, RCM



MOORABBIN

131-133 Keys Road
Moorabbin VIC 3189

ALTONA

1 Drake Boulevard
Altona VIC 3018

ALBION

35 Sandgate Road
Albion QLD 4010

AUCKLAND

10 Fairfax Avenue, Penrose
Auckland 1061, New Zealand

sales@jh.market

www.jh.market

sales@jhmarket.co.nz
jhmarket.co.nz

AU National: 1300 000 808

Queensland: 1300 000 707

NZ National: 0800 748 848

Yiyun Corporation Pty Ltd | All information in this catalogue is subject to change at business discretion.

Please contact the office for confirmation of pricing and stock availability at time of order