



All in-one Exit Light with popular steel FastConnect mounting bracket for quick installation and maintenance.

### Features

- Compatible with industry-leading FastConnect steel brackets
- High performance LED technology
- Advanced Lithium batteries
- Maintained operation
- 24m viewing
- Wall or ceiling mountable
- Complete with running man inserts
- Single or double sided
- Low energy consumption
- Large terminal blocks
- Designed in accordance with AS/NZS 2293


## Ordering Information

Part Number	Description	Box Quantity
MRX-EXQF	FASTCONNECT LED Slide and Connect 24m Maintained Exit Light c/w Lithium Battery	10

## Specifications

Input	Wiring	Lamp	Mode	Viewing	Battery	Autonomy	Mounting	IP	Compliance	Classification
230VAC 50Hz	Hardwired into terminal block	2W LED Strip 50,000 hours	Maintained, Switchable	24m	LiFePO4	> 120 mins	Wall or ceiling, surface mount, suspended	IP20	RCM, AS/NZS 2293, AS/NZS 60598.1	C0 D4 C90 D8

## Dimensions

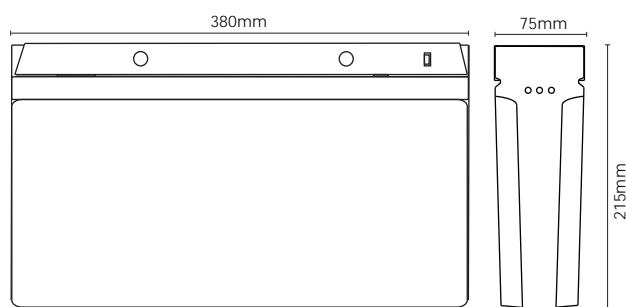

Length

380mm

Width

75mm

Height

215mm

Weight

1.5kg

## Spacing Table and Mounting Heights

NATA Classification	MOUNTING HEIGHT			
	2.1m	2.4m	2.7m	3.0m*
C0 - D4	7.2	7.3	7.3	7.3
C90 - D8	9.4	9.7	9.9	10.1
* Maximum mounting height allowed is 2.7m but for exceptions see AS2293.1				