

SHOP SMART. SHOP VALUE SHOP differently





Sleek, elegant and aesthetically-pleasing Exit Light for customer-facing, modern and sophisticated interior spaces.

Features


- High performance LED technology
- Advanced Lithium batteries
- Maintained operation
- 24m viewing
- Recessed ceiling mounted
- 420mm x 75mm cut-out
- Complete with running man inserts
- Single or double sided
- Low energy consumption
- Complete with 1.2m flex and plug cable
- Designed in accordance with AS/NZS 2293 •

Ordering Information

Part Number	Description	Box Quantity		
MRX-EXRB	RBLADE LED Recessed 24m Maintained Blade Exit Light c/w Lithium Battery	10		
Specificatio	ons			

Input	Wiring	Lamp	Mode	Viewing	Battery	Autonomy	Mounting	IP	Compliance	Classification
230VAC 50Hz	Complete with flex and plug	2W LED Strip 50,000 hours	Maintained	24m	LiFePO4	> 120 mins	Ceiling, recessed mount	IP20	RCM, AS/NZS 2293, AS/NZS 60598.1	C0 D6.3 C90 E3.2

Dimensions

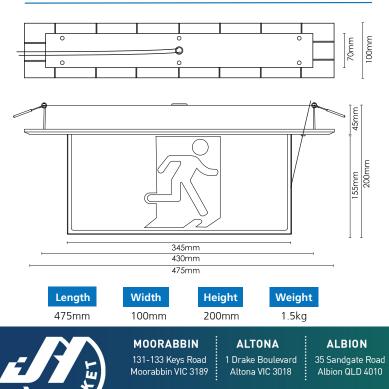

Spacing Table and Mounting Heights

	MOUNTING HEIGHT						
NATA Classification	2.1m	2.4m	2.7m	3.0m*			
C0 - D6.3	8.6	8.8	9.0	9.1			
C90 - E3.2	6.0	6.2	6.4	6.6			
* Maximum mounting height allowed is 2.7m but for exceptions see							

Maximum mounting height allowed is 2.7m but for exceptions see AS2293.1



Yiyun Corporation Pty Ltd | All information in this catalogue is subject to change at business discretion.