


Emerex Wall Box Emergency Exit Light Non Arrow

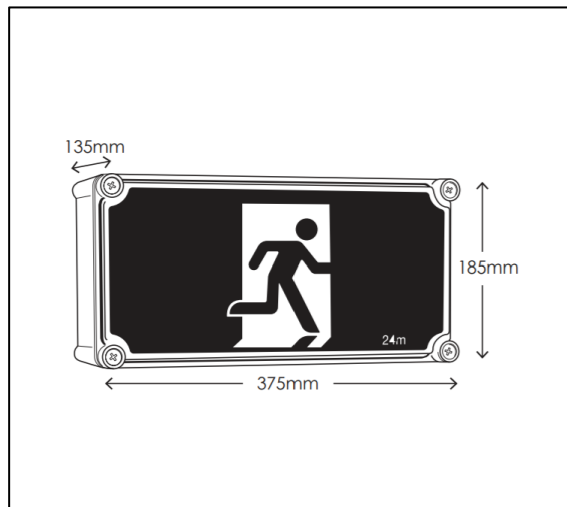

MODEL	CS-MRX-EXWPW-NONARROW-NZ	IK	10
LED BRAND	Osram	OPERATING TEMPERATURE (°C)	0 – 40°C
DRIVER BRAND	SYNNOVATE	MAINTAINED/NON-MAINTAINED OPERATION	Switchable in between
INPUT VOLTAGE (V)	230V	DIMMABLE	NA
POWER FACTOR (PF)	0.95	VIEWING (m)	24
WATTAGE (W)	2W	INSTALLATION TYPE	Surface Mount - Wall
FLICKER FREE	YES	DIMENSION (mm)	375 x 135 x 185
LUMEN OUTPUT (LM)	>30LM	NET WEIGHT (kg)	2.5
EFFICACY (LM/W)	>15LM/W	LIFESPAN (Hours)	50,000
HOUSING COLOUR & MATERIAL	White, ABS	WARRANTY (Years)	3
IP	67	COMPLIANCE	AS/NZS 2293, AS/NZS 60598, RCM