


Emerex Wall/Ceiling Box Exits 48m Viewing

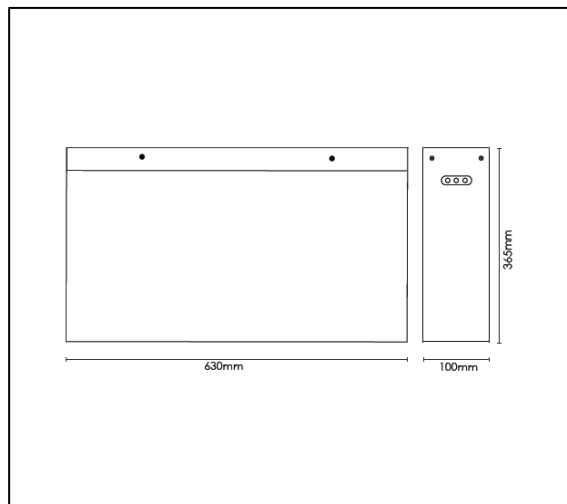

MODEL	CS-MRX-EXXL-NZ	IK	07
LED BRAND	Osram	OPERATING TEMPERATURE (°C)	0 – 40°C
DRIVER BRAND	SYNNOVATE	MAINTAINED/NON-MAINTAINED OPERATION	Maintained
INPUT VOLTAGE (V)	230V	DIMMABLE	NA
POWER FACTOR (PF)	0.95	VIEWING (m)	48
WATTAGE (W)	5W	INSTALLATION TYPE	Surface Mount – Wall / Ceiling
FLICKER FREE	YES	DIMENSION (mm)	630 x 365 x 100
LUMEN OUTPUT (LM)	61.2LM	NET WEIGHT (kg)	3
EFFICACY (LM/W)	12.24LM/W	LIFESPAN (Hours)	50,000
HOUSING COLOUR & MATERIAL	White, Powder coated Folded Sheet Metal	WARRANTY (Years)	3
IP	20	COMPLIANCE	AS/NZS 2293, AS/NZS 60598, RCM