


Emerex Wall/Ceiling 4ft WP Emergency Fitting

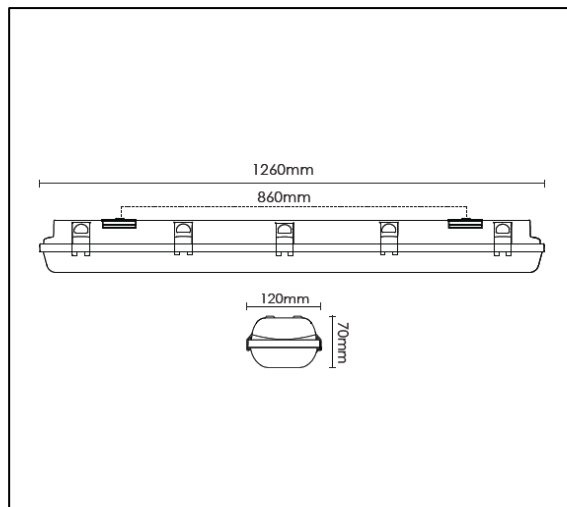

MODEL	CS-MRX-EMWP122-NZ	HOUSING COLOUR & MATERIAL	Grey&White, Polycarbonate
LED BRAND	Osram	IP	65
DRIVER BRAND	SYNNOVATE	IK	10
INPUT VOLTAGE (V)	230V	OPERATING TEMPERATURE (°C)	0 – 40°C
POWER FACTOR (PF)	0.95	MAINTAIN/NON-MAINTAIN OPERATION	Switchable in between
WATTAGE (W)	40W	DIMMABLE (Y/N)	YES
FLICKER FREE	YES	INSTALLATION TYPE	Surface Mount – Wall / Ceiling
LUMEN OUTPUT (LM)	3,800LM	DIMENSION (mm)	1260 x 120 x 70
EFFICACY (LM/W)	95LM/W	NET WEIGHT (kg)	3.0
COLOUR TEMPERATURE	4000K	LIFESPAN (Hours)	50,000
BEAM ANGLE (°)	120°	WARRANTY (Yes)	3
CRI (Ra)	84	COMPLIANCE	AS/NZS 2293, AS/NZS 60598, RCM