


Emerex Wall/Ceiling Oyster Emergency Fitting

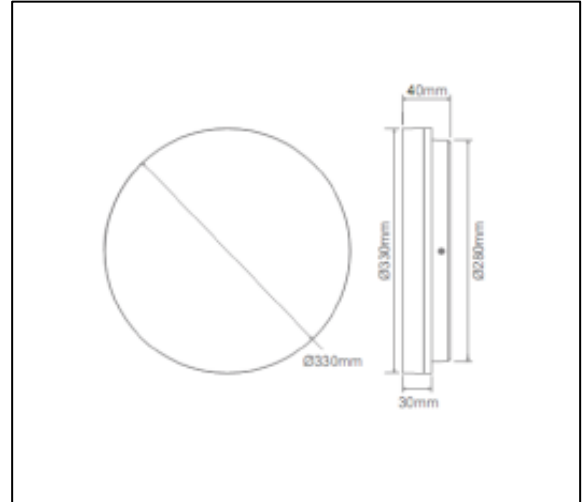

MODEL	CS-MRX-EM330C-NZ	HOUSING COLOUR & MATERIAL	White, Polycarbonate
LED BRAND	Osram	IP	65
DRIVER BRAND	SYNNOVATE	IK	09
INPUT VOLTAGE (V)	230V	OPERATING TEMPERATURE (°C)	0 – 40 °C
POWER FACTOR (PF)	0.95	MAINTAIN/NON-MAINTAIN OPERATION	Switchable in between
WATTAGE (W)	23W	DIMMABLE	YES
FLICKER FREE	YES	INSTALLATION TYPE	Surface Mount – Wall / Ceiling
LUMEN OUTPUT (LM)	2,100LM	DIMENSION (mm)	330 x 330 x 40
EFFICACY (LM/W)	>90LM/W	NET WEIGHT (kg)	2
COLOUR TEMPERATURE	Tricolour: 3000K-4000K-6000K	LIFESPAN (Hours)	50,000
BEAM ANGLE (°)	120°	WARRANTY (Years)	3
CRI (Ra)	>80	COMPLIANCE	AS/NZS 2293, AS/NZS 60598, RCM