




SHOP SMART. SHOP VALUE
SHOP *differently*



Jinhang Integrated Batten Single 2FT & 4FT 5000K

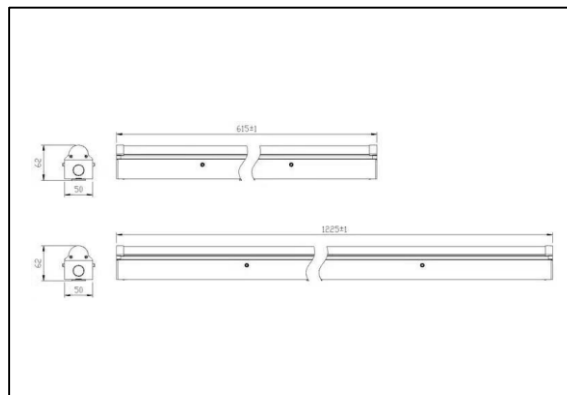

MODEL	JH-IF01-2FT-10W-5000K-NZ	FINISH & MATERIAL	White, Aluminum + PC
INPUT VOLTAGE (V)	AC 100-240V	IP	IP20
PROTECTION CALSS	Class II	AMBIENT TEMPERATURE (°C)	Ta 45°C
POWER FACTOR (PF)	PF>0.9	OPERATING TEMPERATURE (°C)	-20°C to +45°C
WATTAGE (W)	10W / 20W	DIMMABLE	NO
FLICKER FREE	YES	Connection TYPE	Terminal block
LUMEN OUTPUT (LM)	2ft: 1000 LM 4ft: 2000 LM	INSTALLATION TYPE	Ceiling mount
EFFICACY (LM/W)	100 LM/W	DIMENSION (mm)	2ft: L615 x W60 x H62 mm 4ft: L1225 x W60 x H62 mm
COLOUR TEMPERATURE	5000K	NET WEIGHT (kg)	2ft: 0.7kg 4ft: 1.2kg
BEAM ANGLE (°)	120°	LIFESPAN (hr.)	30,000 hr.
CRI (Ra)	80	WARRANTY (yr.)	3 yr.
SDCM	<6		



MOORABBIN

131-133 Keys Road
Moorabbin VIC 3189

ALTONA

1 Drake Boulevard
Altona VIC 3018

ALBION

35 Sandgate Road
Albion QLD 4010

AUCKLAND

10 Fairfax Avenue, Penrose
Auckland 1061, New Zealand

sales@jh.market

www.jh.market

sales@jhmarket.co.nz
jhmarket.co.nz

AU National: 1300 000 808

Queensland: 1300 000 707

NZ National: 0800 748 848