




SHOP SMART. SHOP VALUE
SHOP *differently*

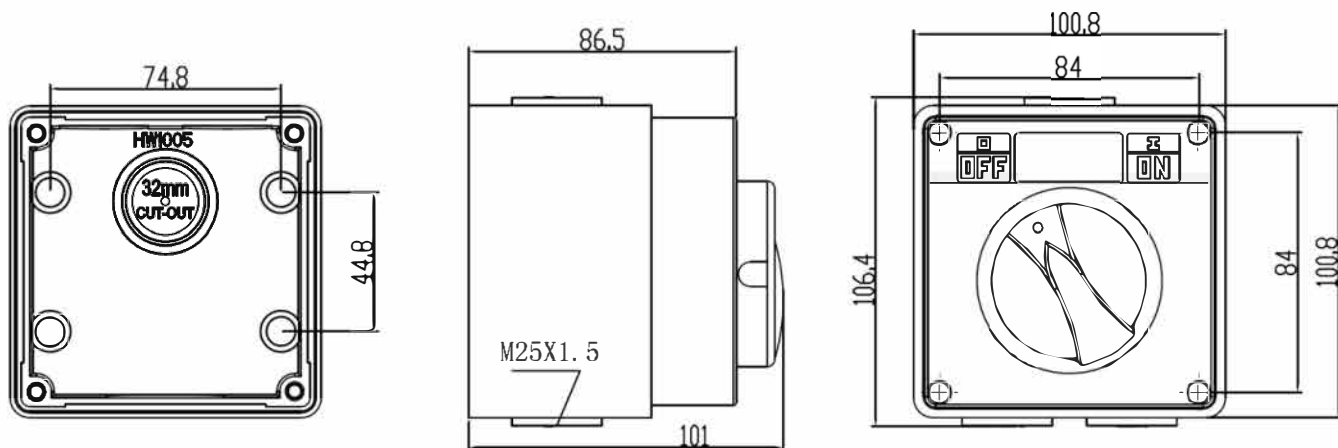

Technical Specifications:

Usage:	Industrial Areas subject to wash-down Outside
Voltage:	250V/500V AC 50HZ
Amp:	10A/16A/20A/32A/40A/50A
IP Rating:	IP66
Boby Material:	Polycarbonate

Item Code	Type	Volts	Amp	MAX. CABLE (mm)	Nominal area of conductor (mm ²)
66SW1P10-NZ	1Pole	250V	10A	Max. 24	1
66SW1P16-NZ	1Pole	250V	16A		2.5
66SW1P20-NZ	1Pole	250V	20A		2.5
66SW1P32-NZ	1Pole	250V	32A		6
66SW2P10-NZ	2Pole	500V	10A		1
66SW2P16-NZ	2Pole	500V	16A		2.5
66SW2P20-NZ	2Pole	500V	20A		2.5
66SW2P32-NZ	2Pole	500V	32A		6
66SW2P40-NZ	2Pole	500V	40A		10
66SW2P50-NZ	2Pole	500V	50A		10
66SW3P10-NZ	3Pole	500V	10A		1
66SW3P16-NZ	3Pole	500V	16A		2.5
66SW3P20-NZ	3Pole	500V	20A		2.5
66SW3P32-NZ	3Pole	500V	32A		6
66SW3P40-NZ	3Pole	500V	40A		10
66SW3P50-NZ	3Pole	500V	50A		10



MOORABBIN

131-133 Keys Road
Moorabbin VIC 3189

ALTONA

1 Drake Boulevard
Altona VIC 3018

ALBION

35 Sandgate Road
Albion QLD 4010

AUCKLAND

10 Fairfax Avenue, Penrose
Auckland 1061, New Zealand

sales@jh.market

www.jh.market

sales@jhmarket.co.nz

jhmarket.co.nz

AU National: 1300 000 808

Queensland: 1300 000 707

NZ National: 0800 748 848

Yiyun Corporation Pty Ltd | All information in this catalogue is subject to change at business discretion.

Please contact the office for confirmation of pricing and stock availability at time of order