




SHOP SMART. SHOP VALUE
SHOP *differently*



JinHang 2nd Gen 42W 1500mm Integ WP Batten CCT Dble

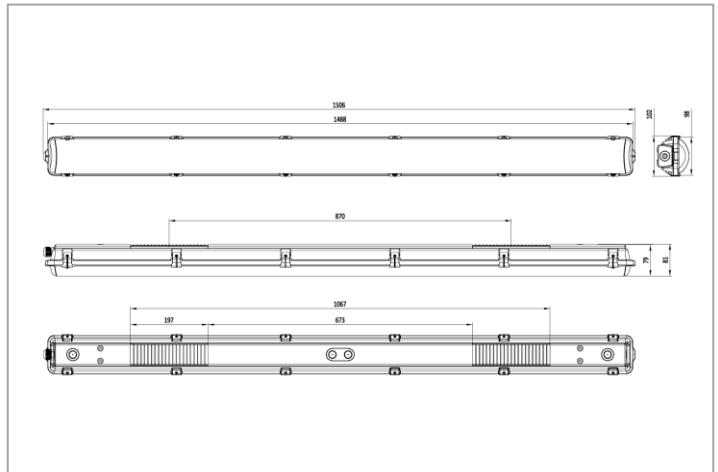

SIU	JH-WB2-1500-42W-CCT-NZ	BEAM ANGLE (°)	120
INPUT VOLTAGE (V)	AC 220-240V	HOUSING COLOUR	White
IC-4 RATED (Y/N)	NO	MATERIAL	prismatic opal
POWER FACTOR (PF)	0.9	IP / IK	IP66 / IK08
WATTAGE (W)	42W	OPERATING TEMPERATURE (°C)	-15°C ~ +35°C
FLICKER FREE (Y/N)	NO	DIMMABLE (Y/N)	NO
LUMEN OUTPUT (LM)	5,670LM @4000K	INSTALLATION TYPE	Surface mount
EFFICACY (LM/W)	135LM/W @4000K	DIMENSION (mm)	1506*102*81
COLOUR TEMPERATURE (K)	CCT (3000K-4000K-5700K)	NET WEIGHT (kg)	2
BEAM ANGLE (°)	120	LIFESPAN (HOURS)	50,000
CRI (Ra)	80	WARRANTY (YEARS)	5



MOORABBIN

131-133 Keys Road
Moorabbin VIC 3189

ALTONA

1 Drake Boulevard
Altona VIC 3018

ALBION

35 Sandgate Road
Albion QLD 4010

AUCKLAND

10 Fairfax Avenue, Penrose
Auckland 1061, New Zealand

sales@jh.market
www.jh.market

sales@jhmarket.co.nz
jhmarket.co.nz

AU National: 1300 000 808
Queensland: 1300 000 707
NZ National: 0800 748 848

Yiyun Corporation Pty Ltd | All information in this catalogue is subject to change at business discretion.
Please contact the office for confirmation of pricing and stock availability at time of order