


## Future Highbay 200W 5000K 120D

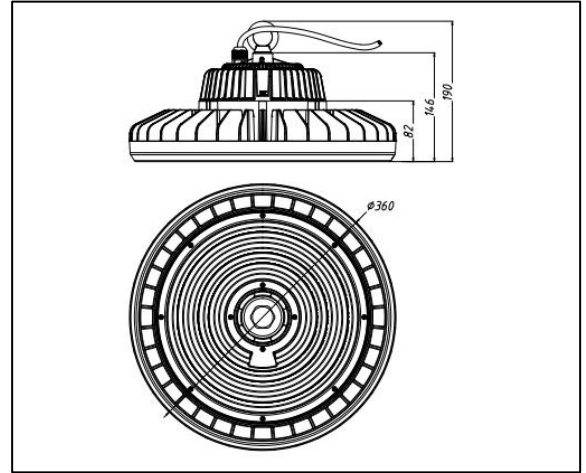

|                               |                             |                                   |                    |
|-------------------------------|-----------------------------|-----------------------------------|--------------------|
| <b>MODEL</b>                  | CS-FYT-HB09-200W-5000K-120D | <b>HOUSING COLOUR</b>             | Black              |
| <b>INPUT VOLTAGE (V)</b>      | AC 100-277V                 | <b>MATERIAL</b>                   | Aluminum + PC lens |
| <b>PROTECTION CALSS</b>       | Class I                     | <b>IP</b>                         | 65                 |
| <b>IC-4 RATED (Y/N)</b>       | No                          | <b>IK</b>                         | 10                 |
| <b>SPD (KV)</b>               | L-N: 4KV; L/N-GND: 6KV      | <b>AMBIENT TEMPERATURE (°C)</b>   | Ta 55°C            |
| <b>POWER FACTOR (PF)</b>      | >0.95                       | <b>OPERATING TEMPERATURE (°C)</b> | -30 to +55°C       |
| <b>WATTAGE (W)</b>            | 200W                        | <b>DIMMABLE (Y/N)</b>             | YES                |
| <b>FLICKER FREE (Y/N)</b>     | Yes                         | <b>DIMMING TYPE</b>               | 1-10V              |
| <b>LUMEN OUTPUT (LM)</b>      | 26,000LM                    | <b>INSTALLATION TYPE</b>          | Suspension         |
| <b>EFFICACY (LM/W)</b>        | 130LM/W                     | <b>DIMENSION</b>                  | Φ360*188mm         |
| <b>COLOUR TEMPERATURE (K)</b> | 5000K                       | <b>NET WEIGHT</b>                 | 4.8kg              |
| <b>BEAM ANGLE (°)</b>         | 120°                        | <b>LIFE SPAN</b>                  | 50,000hrs          |
| <b>CRI (Ra)</b>               | >80                         | <b>WARRANTY</b>                   | 5 years            |
| <b>SDCM</b>                   | <5                          | <b>COMPLIANCE</b>                 | SAA, RCM           |