



OVER 8000 SPARKIES
HAVE MADE THE SWITCH



FL-E4DLiA

Trad Exit Light



Features

- Wall or ceiling mounting, IP20
- LiFePO4 battery, replaceable
- Non-maintained or maintained operation
- Intelligent charge and discharge
- 3 hours emergency duration
- Classification
- Wall mounting diffuser: C0/D4, C90/D2.5
- Ceiling mounting diffuser: C0/D8, C90/D6.3
- Self test is customizable

Materials

- Housing: ABS, 850°C glow wire test
- Diffuser: PS, 650°C glow wire test
- Legend: PC

Standard Compliance

- AS2293.3
- AS 60598.2.22
- AS/NZS 60598.1
- AS CISPR 15
- IEC62133
- AS61347-2-7

Accessories

- Ceiling mounting diffuser (option)



AS2293


3H

LiFePO4


Technical Specifications

Mains Supply	220-240VAC ,50/60Hz
Power	4 W
Duration Time	3 Hours
Recharge Period	16 Hours
Battery Size & Type	LiFePO4 3.2V1.5Ah
LED Power	0.7 W (emergency) 1.0 W (maintained)
CCT	6500 K
CRI	70
Luminous Flux (with legend)	50 lm (emergency) 75 lm (maintained)
View Distance	24 m
Beam Angle	N/A
Protection Class	Class II
Operating Temperature	0-40 °C


Dimensions

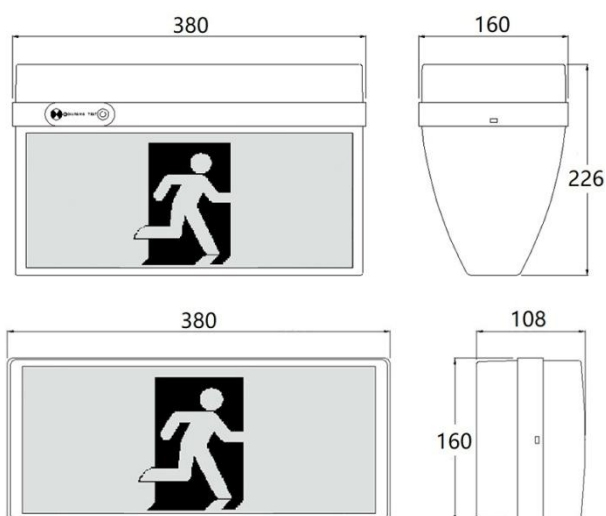

Photometric Datasheet

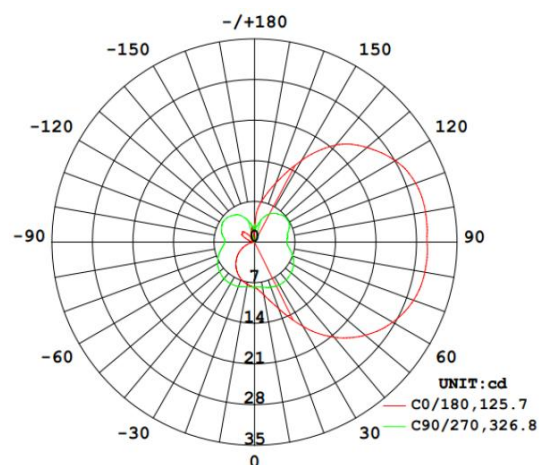

Wall mounting diffuser

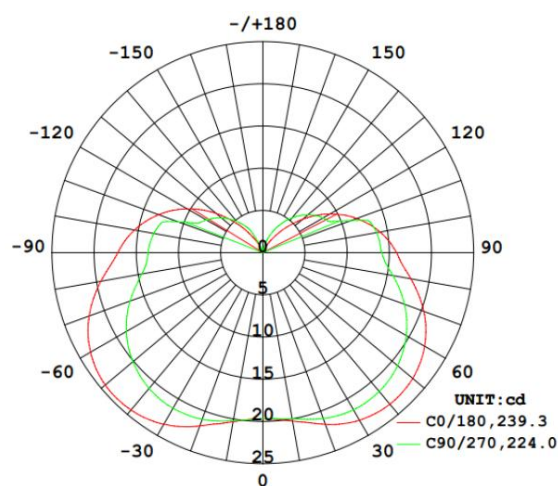

Ceiling mounting diffuser

Accessories

Ceiling mounting diffuser (option)

