


VERTEX OP LED Dimmer Rotatory

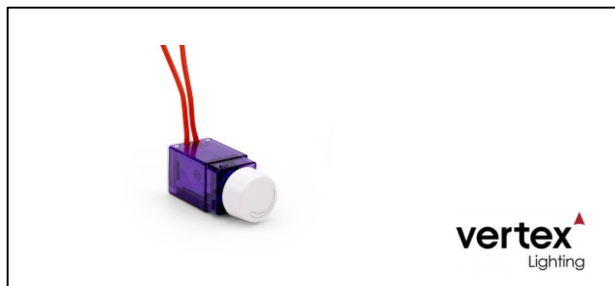

Model	CS-OP-AU-RD350VA-NZ	Dimmer Type	Trailing edge
Fixing Mode	Clip-in	Colour Tint	Purple
Surface Finish	Glossy	Ambient Air Temperature for Storage	0 to +60 °C
Dimmer Control	315° rotary setting	Rated Operational Current	1.5A
Rated Operational Voltage	220...240VAC; 50Hz	Minimum Load	5W
Derated Value Per Dimmer	350W	Load Type	Dimmable LED 150W (240 V AC) Incandescent 350W (240 V AC) Low voltage halogen lamp with electronic transformer 350W (240 V AC) Dimmable fluocompact lamp 150W (240 V AC) Dimmable fluorescent 150W (240 V AC)
Derating Factor	Number of devices 1 350W without derating Number of devices 2 300W with derating Number of devices 3 250W with derating	Function Available	Brightness adjustment
Protection Type	Over temperature	Control Type	Rotary knob
Connections	Flying leads	Wiring Device Mounting	Iconic clip with locking bar
Material	PC	Size	H56.22 x W23.10 x D23.10 mm
Embedding Depth	38.80mm	Ambient Air Temperature for Operation	0 to +45 °C
Relative Humidity	0...90%	Warranty	3 yrs.