

Emerex Surface Mounted Spitfire

CS-MRX-EMSMD-NZ



A reliable, easy-to-install, versatile and bright source of Emergency Lighting in a low profile, surface mounted enclosure.


Features

- Lifetime warranty on LED lamp
- D40 emergency classification
- Advanced Lithium batteries
- Surface or suspended mounted - ceiling
- Non-maintained operation
- Low energy consumption
- Large terminal blocks
- Designed in accordance with AS/NZS 2293

Specifications

Input	Wiring	Lamp	Mode	Battery	Autonomy	Mounting	IP	Compliance	Classification
230VAC 50Hz	Hardwired into terminal block	3W LED 5700K Lifetime Warranty	Non-Maintained	LiFePO4	> 120 mins	Ceiling, surface mount	IP20	RCM, AS/NZS 2293, AS/NZS 60598.1	C0 D40 C90 D40

Dimensions

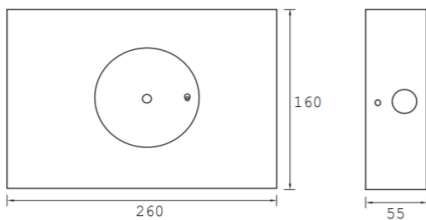

Length	Width	Height	Weight
260mm	160mm	55mm	1.2kg

Spacing Table and Mounting Heights

NATA Classification	MOUNTING HEIGHT							
	2.1m	2.4m	2.7m	3.0m	4.0m	5.0m	6.0m	8.0m
C0 - D40	16.7	17.4	18.0	18.6	20.1	21.3	22.1	23.0
C90 - D40	16.7	17.4	18.0	18.6	20.1	21.3	22.1	23.0